


### ■ G15A□

1Bar = 0,1MPa



TECHNICAL DATA				Pump type G15AH00 / AS00			
Air supply pressure		0,2-0,7	MPa	Max. viscosity (neg. suc.)		500	Cp
Max. discharge volume/cycle		160	ml	Max. viscosity (flooded suction.)		500	Cp
Max. discharge volume		58	l/min	Max. air consumption		520	NL/min
Max. discharge pressure		0,7	MPa	Max. noise level		77,5	dB(a)
Max. size of solids		1	mm	Operating temp. ambient		0-70	°C
Max. suction lift dry		PTFE fitted		<b>Max operating temp. fluid</b>			
Max. suction lift wet		PTFE fitted		Diaphragm compound	AH00 - TPEE	0 - 80	°C
Max. fluid inlet pressure		PTFE fitted		Diaphragm compound	AS00 - TPO	0 - 100	°C
Max. suction lift dry		Rubber fitted	2,5	Diaphragm compound			
Max. suction lift wet		Rubber fitted	4,0				
Max. fluid inlet pressure		Rubber fitted	0,1	MPa	Net Weight	Type A	ALU
						5,4	Kg
Caution! Data based on water (1 Cp)							
Wetted parts: Pump chambers + manifolds				ADC12 - Aluminum			
Motor				ADC12 - Aluminum			

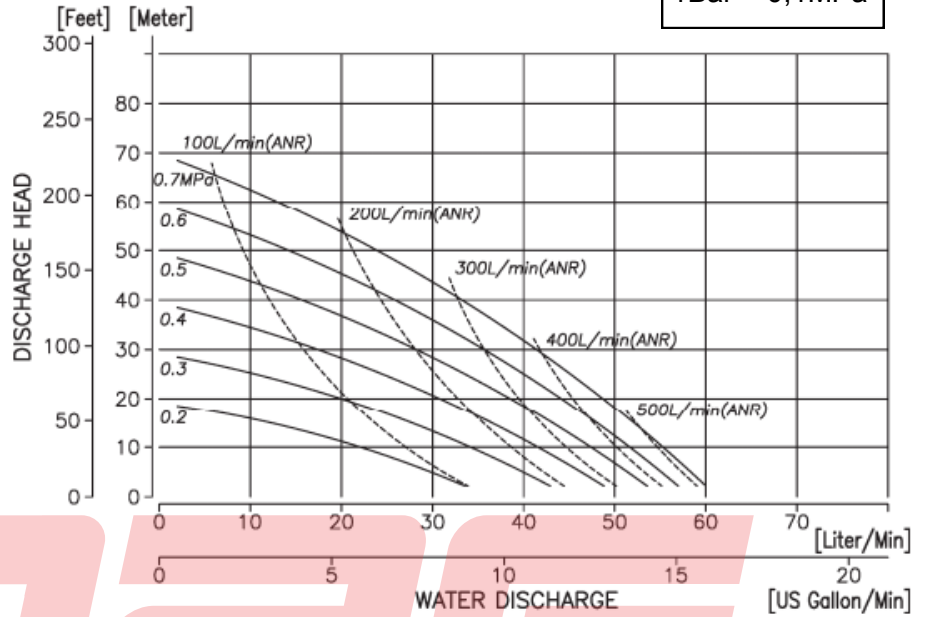